


## Angle Hoes Valve

### BH-3 (A97H)

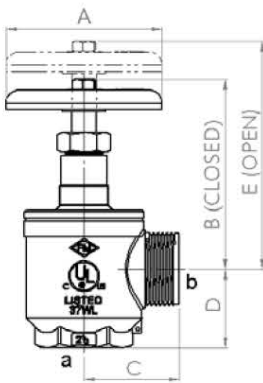

#### FEMALE x MALE


Used with a Fire Hose Rack Assembly, or as a Fire Dept. outlet connection.

#### Standard equipment:

Female NPT inlet x male hose thread (**Specify thread**) Outlet cast brass valve. Red hand wheel.

#### Optional Finishes:

- RB-Rough Brass
- PB-Polished Brass
- RC-Rough Brass Plated
- PC-Polished Chrome Plated




CERTIFICATIONS	a	b
UL FM	1½"	1½"
UL FM	2½"	2½"

	1½"	2½"
A	3.99"	3.99"
B		5.9"
C	2.44"	3.99"
D	2"	2.75"
E		7.67"

## Angle Hoes Valve

### BH-4 (A97)

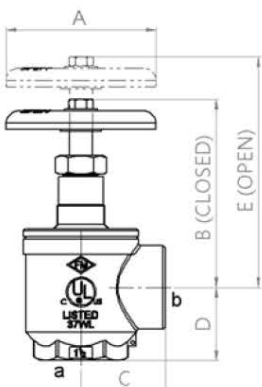

#### DOUBLE FEMALE

Used with a Fire Hose Rack Assembly, or as a Fire Dept. outlet connection.

#### Standard equipment:

Female NPT inlet and outlet cast brass valve. Red hand wheel.

#### Optional Finishes:

- RB-Rough Brass
- PB-Polished Brass
- RC-Rough Brass Plated
- PC-Polished Chrome Plated



CERTIFICATIONS	a	b
UL FM	1½"	1½"
UL FM	2½"	2½"

	1½"	2½"
A	3.99"	3.99"
B		5.9"
C	2.44"	3.99"
D	2"	2.75"
E		7.67"